



## Features :

- Universal AC input/Full range
- Protections: Short circuit/Over load/Over voltage
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- Isolation class II
- LED indicator for power on
- 100% full load burn-in test

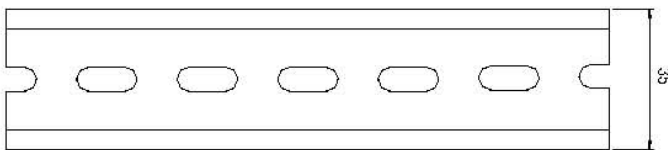
| MODEL                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | DR-30-5                                                                                                                              | DR-30-12     | DR-30-15       | DR-30-24     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|--------------|----------------|--------------|
| OUTPUT                   | DC VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 5V                                                                                                                                   | 12V          | 15V            | 24V          |
|                          | RATED CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 3A                                                                                                                                   | 2A           | 2A             | 1.5A         |
|                          | CURRENT RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 0 ~ 3A                                                                                                                               | 0 ~ 2A       | 0~2A           | 0 ~ 1.5A     |
|                          | RATED POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 15W                                                                                                                                  | 24W          | 30W            | 36W          |
|                          | RIPPLE & NOISE (max.) <b>Note.2</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 80mVp-p                                                                                                                              | 120mVp-p     | 120mVp-p       | 150mVp-p     |
|                          | VOLTAGE ADJ. RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 4.75 ~ 5.5V                                                                                                                          | 10.8 ~ 13.2V | 13.5 ~ 16.5V   | 21.6 ~ 26.4V |
|                          | VOLTAGE TOLERANCE <b>Note.3</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ±2.0%                                                                                                                                | ±1.0%        | ±1.0%          | ±1.0%        |
|                          | LINE REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ±1.0%                                                                                                                                | ±1.0%        | ±1.0%          | ±1.0%        |
|                          | LOAD REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ±1.0%                                                                                                                                | ±1.0%        | ±1.0%          | ±1.0%        |
|                          | SETUP, RISE TIME                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 100ms, 30ms/230VAC    100ms, 30ms/115VAC at full load                                                                                |              |                |              |
|                          | HOLD TIME(Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 100ms/230VAC    30ms/115VAC at full load                                                                                             |              |                |              |
| INPUT                    | VOLTAGE RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 85 ~ 264VAC    120 ~ 370VDC                                                                                                          |              |                |              |
|                          | FREQUENCY RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 47 ~ 63Hz                                                                                                                            |              |                |              |
|                          | EFFICIENCY (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 74%                                                                                                                                  | 81%          | 82%            | 83%          |
|                          | AC CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 0.88A/115VAC    0.48A/230VAC                                                                                                         |              |                |              |
|                          | INRUSH CURRENT(max.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | COLD START 15A/115VAC 30A/230VAC                                                                                                     |              |                |              |
| PROTECTION               | OVERLOAD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 105 ~ 160% rated output power<br>Protection type : Constant current limiting,recovers automatically after fault condition is removed |              |                |              |
|                          | OVER VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 5.75 ~ 6.75V                                                                                                                         | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 27.6 ~ 32.4V |
|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Protection type : Shut down o/p voltage,re-power on to recover                                                                       |              |                |              |
| ENVIRONMENT              | WORKING TEMP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | -20 ~ +60°C (Refer to output load derating curve)                                                                                    |              |                |              |
|                          | WORKING HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 20 ~ 90% RH non-condensing                                                                                                           |              |                |              |
|                          | STORAGE TEMP., HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | -20 ~ +85°C , 10 ~ 95% RH                                                                                                            |              |                |              |
|                          | TEMP. COEFFICIENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ±0.03%/°C (0 ~ 50°C)                                                                                                                 |              |                |              |
|                          | VIBRATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 10 ~ 500Hz, 2G 10min./1 cycle, 60min. each along X, Y, Z axes                                                                        |              |                |              |
| SAFETY & EMC<br>(Note 4) | SAFETY STANDARDS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Design refer to UL60950-1,TUV EN60950-1,EN50178                                                                                      |              |                |              |
|                          | WITHSTAND VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | I/P-O/P:3KVAC    I/P-FG:1.5KVAC    O/P-FG:0.5KVAC                                                                                    |              |                |              |
|                          | ISOLATION RESISTANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC                                                                                             |              |                |              |
|                          | EMI CONDUCTION & RADIATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Compliance to EN55022 (CISPR22) Class B                                                                                              |              |                |              |
|                          | HARMONIC CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Compliance to EN61000-3-2,-3                                                                                                         |              |                |              |
|                          | EMS IMMUNITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Compliance to EN61000-4-2,3,4,5; ENV50204, EN55024, Light industry level, criteria A                                                 |              |                |              |
| OTHERS                   | MTBF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 441.5K hrs min. MIL-HDBK-217F (25°C)                                                                                                 |              |                |              |
|                          | DIMENSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 78*93*56mm (L*W*H)                                                                                                                   |              |                |              |
|                          | PACKING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0.27Kg; 48pcs/14Kg/1.02CUFT                                                                                                          |              |                |              |
| NOTE                     | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation.<br>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. |                                                                                                                                      |              |                |              |

**Mechanical Specification**

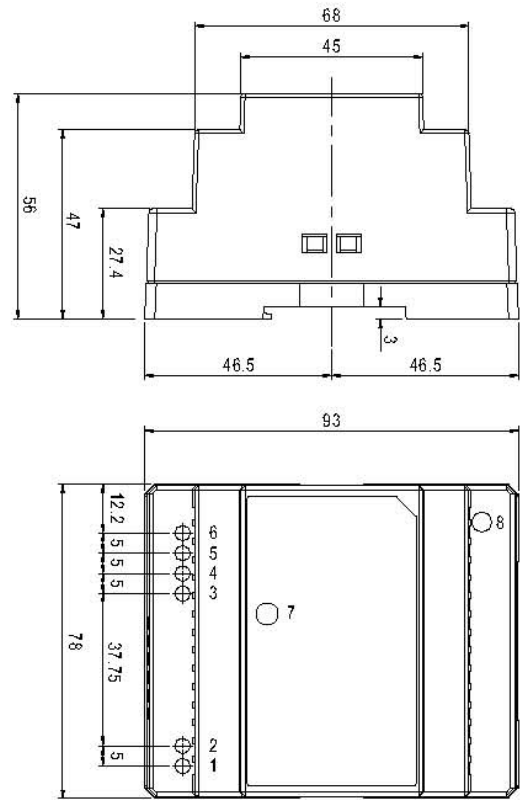
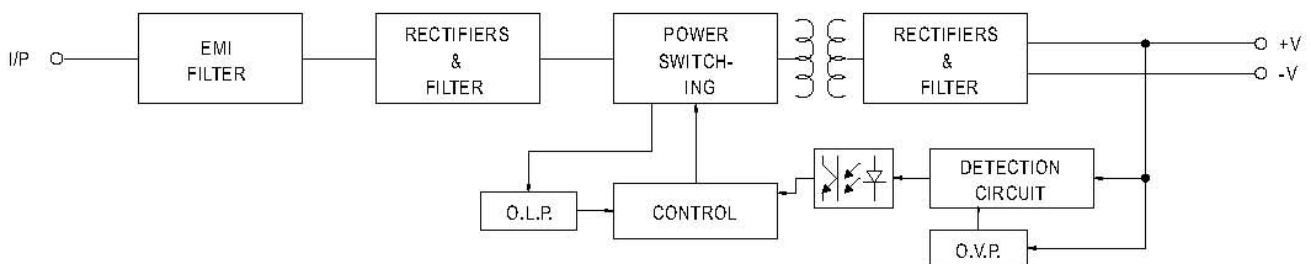
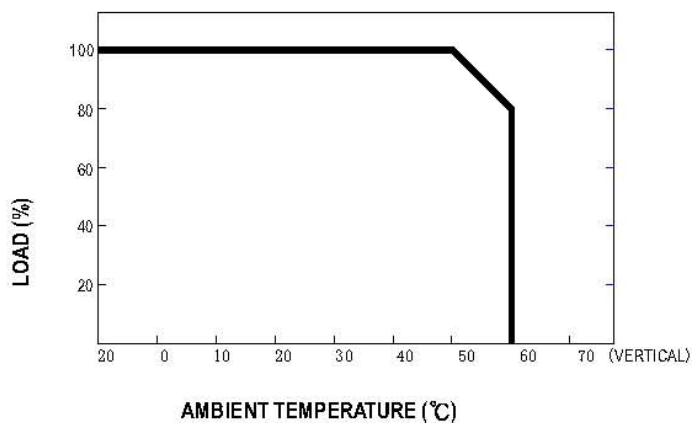
Unit: mm

Terminal Pin. No Assignment

| Pin No. | Assignment | Pin No. | Assignment |
|---------|------------|---------|------------|
| 1       | AC/N       | 5,6     | -V         |
| 2       | AC/L       | 7       | LED        |
| 3,4     | +V         | 8       | +VADJ.     |



ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15


**Block Diagram**

**Output Derating**

**Output Derating VS Input Voltage**
